

originally specified in the GDM. Discharges from the TFMCA to the SJMCA would occur over a fixed crest weir and through a culvert structure (S-257). All areas of

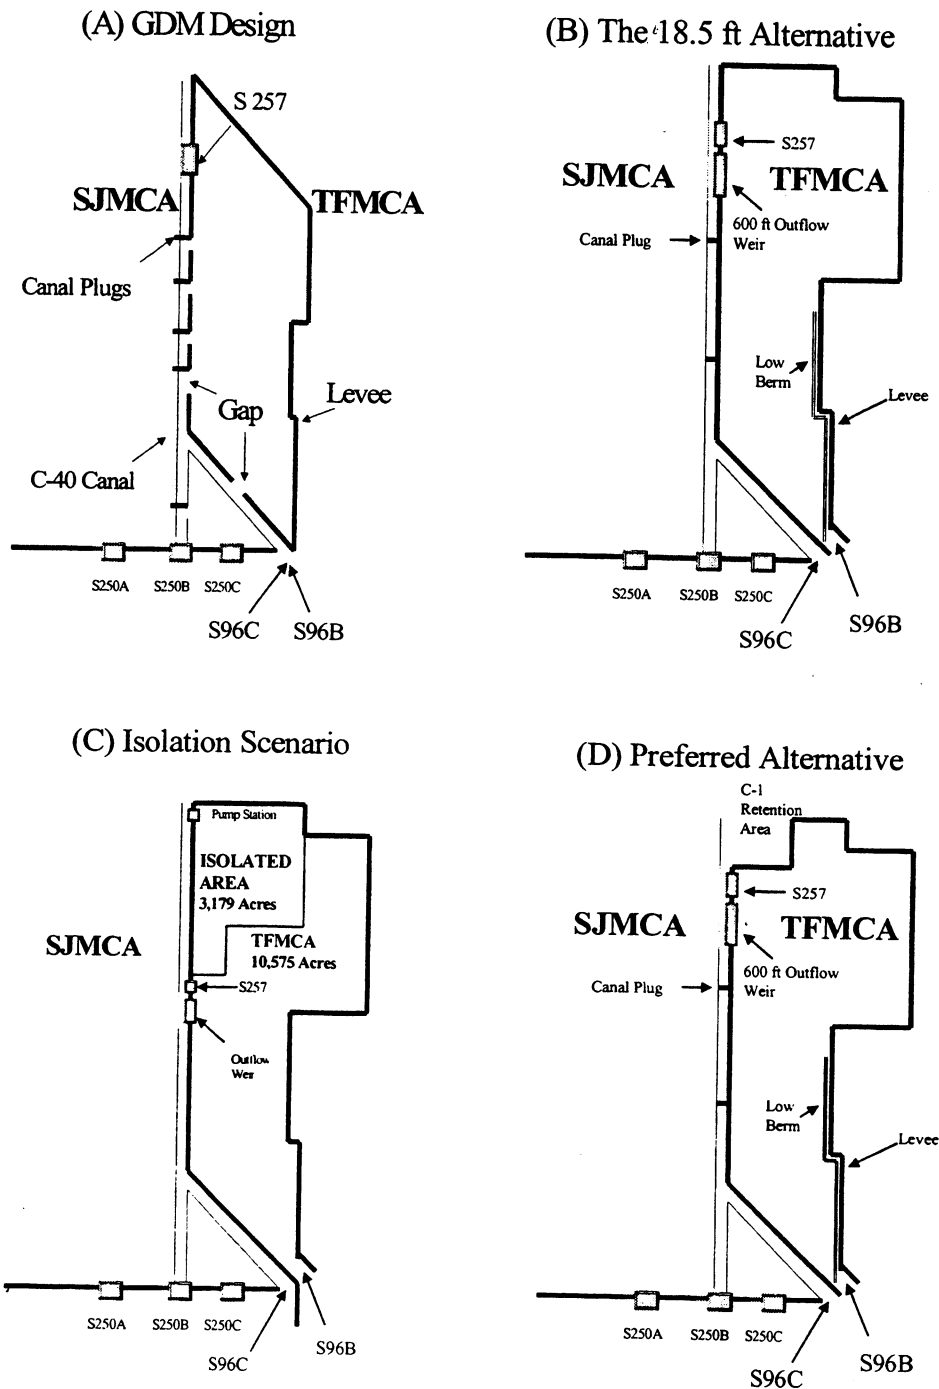


Figure 9. Design alternatives evaluated for the TFMCA: (A) the GDM or No Action Alternative, (B) the 18.5 ft Alternative, (C) the Isolation Alternative, and (D) the Preferred Alternative.